


LOAD CHART FOR PALLET RACK

Interlocking beams are sections made out of CRCA / HR Steel Via Roll Forming Process and then INTER- LOCKED into one another making the beams strong enough to carry the designed weight , These beams are welded at both ends with 3/4 Lip connectors designed to be fixed in the selected Upright . Below Given Are The Standard Available Beam Sizes With its Load Bearing Capacity :

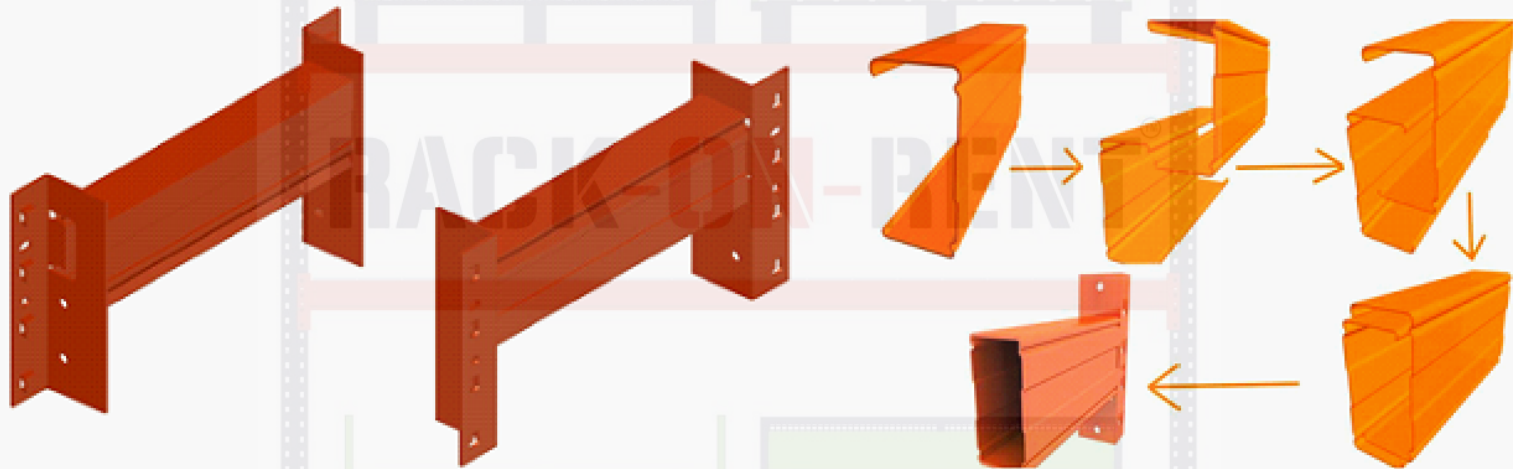

LOAD CHART FOR PALLET RACK

SPECIFICATION	LENGTH							
	1500mm	1800mm	2000mm	2300mm	2500mm	2700mm	3000mm	3300mm
60x50x1.6mm	2000 KG	1700 KG	1600 KG	1400 KG	1000 KG	700 KG	500 KG	350 KG
80x50x1.6mm	3300 KG	2300 KG	1786 KG	1440 KG	1200 KG	1000 KG	800 KG	650 KG
100x50x1.6mm	5200 KG	3700 KG	3100 KG	2600 KG	2000 KG	1900 KG	1350 KG	1100 KG
120x50x1.6mm		5800 KG	4600 KG	3800 KG	2850 KG	2300 KG	1990 KG	1600 KG
140x50x1.6mm		6800 KG	5200 KG	4400 KG	3200 KG	2750 KG	2100 KG	1900 KG
150x50x1.6mm		7200 KG	5900 KG	4800 KG	3650 KG	3200 KG	3000 KG	2400 KG